

TECHNICAL DATA

REV	DESCRIPTION OF REVISION	ECN No.	BY	DATE	APPROVED
Rv01	N/A	N/A	J.Wang	2013/5/19	Karl Pan

Electrical data

Impedance	50Ω
Frequency range	0~6GHz
Withstand Voltage	2000V rms
Working Voltage	1700V
VSWR	≤ 1.25
Insulation resistance	≥10000MΩ

Mechanical data


Temperature range	-55°C~+155°C
Durability(matings)	>500

Material data

Piece Part	Base Material	Plating
Body	Brass	Tri-Metal plated
Center conductor	Brass	Silver plated
Insulator	PTFE	

Interface Standards

IEC 60169-16 /MIL-C-39012/CECC22210

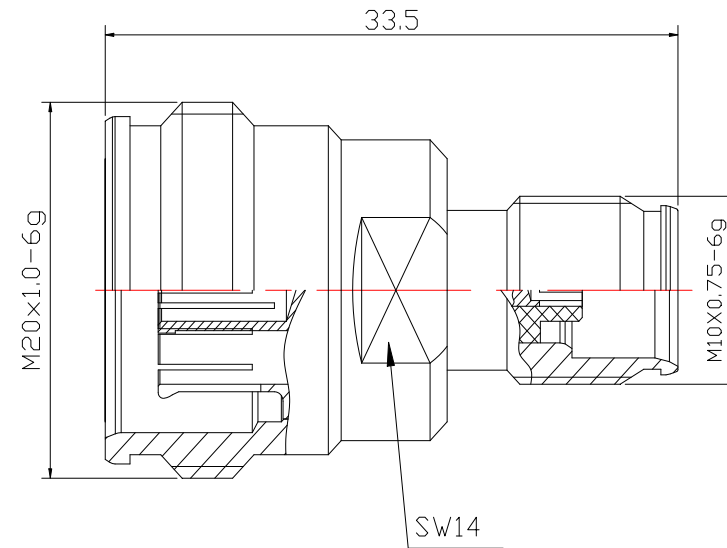

4.3-10 female



NEX10 female

NOTES:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITH NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Part Name:	 www.rfvoton.com			
4.3-10 female to NEX10 female adaptor				
WT24D3.640.2227	SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: A