

TECHNICAL DATA

REV	DESCRIPTION OF REVISION	ECN No.	BY	DATE	APPROVED
Rv01	N/A	N/A	J.Wang	2013/5/19	Karl Pan

■Electrical data

Impedance	50Ω
Frequency range	0~3GHz
Withstand Voltage	2000V rms
Working Voltage	1700V
VSWR	≤ 1.2
Insulation resistance	≥10000MΩ

■Mechanical data


Temperature range	-55°C~+155°C
Durability(matings)	>500

■Material data


Piece Part	Base Material	Plating
Body	Brass	Tri-Metal plated
Center conductor	Brass	Silver plated
O-ring sealing	6146 silastic	
Insulator	PTFE	

■Interface Standards


IEC 60169-16 /MIL-C-39012/CECC22210

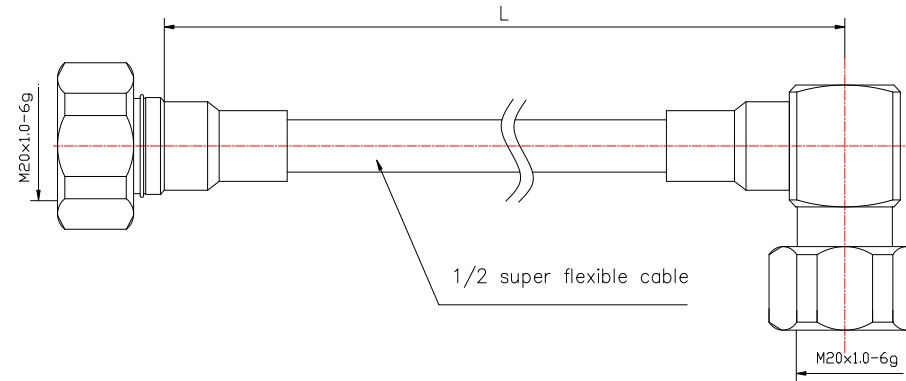

L	
2m	3m



4.3/10 male

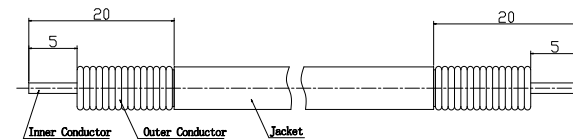

4.3/10 male

NOTES:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITH NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Part Name:					
4.3-10 male to 4.3-10 Male right angle for 1-2 Super Flexible Cable					
		  DIMENSIONS IN MILLIMETERS(mm)			
WT23D3.640.1707		SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: A