

TECHNICAL DATA

REV	DESCRIPTION OF REVISION	ECN No.	BY	DATE	APPROVED
Rv01	N/A	N/A	J.Wang	2013/5/19	Karl Pan

Electrical data

Impedance	75Ω
Frequency range	0~3GHz
Withstand Voltage	1500V rms
Working Voltage	500V
VSWR	≤ 1.3
Contact resistance	
-center contact	≤1.5mΩ
-outer contact	≤1mΩ
Insulation resistance	≥5000MΩ

Mechanical data


Temperature range	-55°C~+155°C
Durability(matings)	>500

Material data

Piece Part	Base Material	Plating
Body	Brass	Nickel plated
Center conductor	Brass	Gold plated
Insulator	PTFE	
Crimping suite	Copper alloy	Nickel plated

Interface Standards

IEC 60169-16 /MIL-C-39012/CECC22210

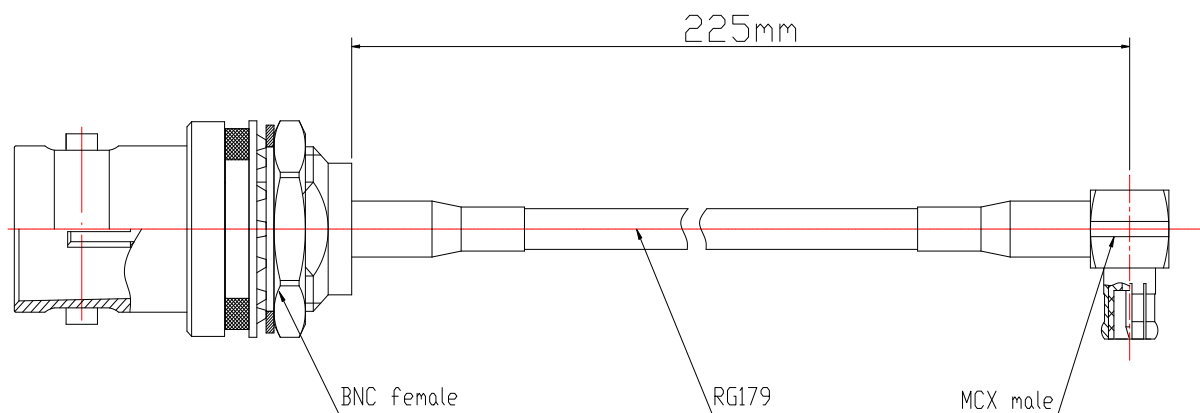

NOTES:

- 1.ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITH NOTICE AT ANY TIME
- 2.CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Part Name:				
BNC female to MCX male right angle for RG179				
	 DIMENSIONS IN MILLIMETERS(mm)			
WT24D3.640.2280	SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: A