

RG Series Cable

RG142 Coax Cable Double shielded With Tan FEP Jacket

2014-11-23 18:50 Clicks:


RG142 Coax Cable Double shielded With Tan FEP Jacket

BJDZ P/N: RG142

Highlights:

RoHS Certificate: Compliant

Data Sheet: [Datasheet Download](#)

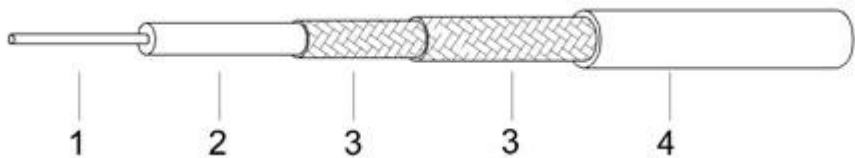

Construction Specification		
Item	Material	Diamenters (mm)
1. Inner Conductor	Silver Plated Copper Clad Steel	0.94
2. Dielectric	PTFE	2.95
3. Outer Conductor	Double Silver Plated Copper Braid	3.95
4. Jacket	FEP	4.95

Electrical Characteristics		
Capacitance (Pf/M)		96.45
Impedance (Ohm)		50
Velocity(%)		70
Max. Oper. Voltage (VMS)		1900
Max. Oper. Frequency (MHz)		800
Bending Radius (mm)		25
Operating Temp. (°C)		-55 to 200

Attenuation (Typical)		
Frequency (MHz)		Attenuation (≥dB/100m)
100		12.5

400		25.6
1000		42.0
3000		78.1
5000		105.0