

Flexible RG223 Coax Cable with Double Shielded PVC Jacket [P

2014-11-23 20:21

Clicks:


RG223 Coax Cable with Double Shielded PVC Jacket

BJDZ P/N: RG223

Highlights:

RoHS Certificate: Compliant

Data Sheet: [Datasheet Download](#)

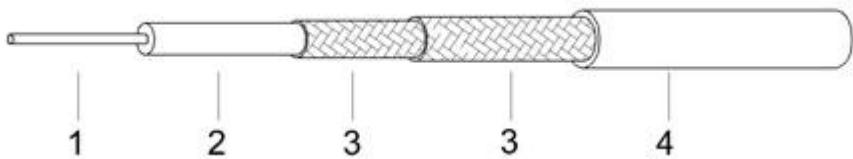

Construction Spectionification		
Item	Material	Diameter (mm)
1. Inner Conductor	Silver Plated Copper	0.90
2. Dielectric	Solid Polyethylene	2.95
3. Outer Conductor	Double Silver Plated Copper Braid	3.95
4. Jacket	PVC	5.30

Electrical Characteristics		
Capacitance (Pf/M)		101.05
Impedance (Ohm)		50
Velocity(%)		66
Max. Oper. Voltage (VMS)		1900
Max. Oper. Frequency (MHz)		12400
Bending Radius (mm)		25
Operating Temp. (°C)		-20 to 80

Attenuation (Typical)		
Frequency (MHz)		Attenuation (≥dB/100m)
100		13.1
400		26.9
1000		44.0
3000		81.4
5000		109.9
11000		177.5