


RG400 Coax Cable With Double Shielded Tan FEP Jacket

2014-11-25 09:40 Clicks:

RG400 Coax Cable With Double Shielded Tan FEP Jacket

RFVOTON P/N: RG400

Highlights:
RoHS Certificate: Compliant
Data Sheet: [Datasheet Download](#)

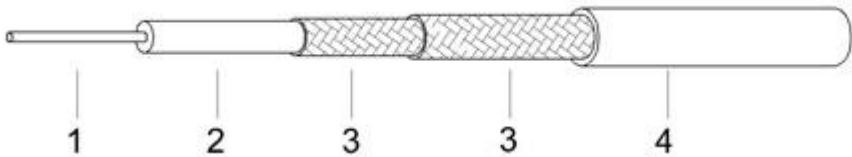

Construction Spectionification		
Item	Material	Diamenters (mm)
1. Inner Conductor	Silver Plated Copper	19x0.203
2. Dielectric	PTFE	2.95
3. Outer Conductor	Double Silver Plated Copper Braid	3.95
4. Jacket	FEP	4.95

Electrical Characteristics		
Capacitance (Pf/M)		105
Impedance (Ohm)		50
Velocity(%)		70
Max. Oper. Voltage (VMS)		1900
Max. Oper. Frequency (MHz)		12400
Bending Radius (mm)		25
Operating Temp. (℃)		-55 to 200

Attenuation (Typical)		
Frequency (MHz)		Attenuation (≥dB/100m)
100		14.4
400		29.5
1000		48.2
3000		88.3
5000		118.4
11000		189.9